

Part Number **HSR-634W** Contact Form C Switch Configuration SPDT Rev. E

100 Watt Power Rated Switch

Features	Advantages
<ul style="list-style-type: none"> Hermetically sealed contacts Leaded glass currently exempted from RoHS requirements Solid Tungsten contacts UL recognized component 	<ul style="list-style-type: none"> Extended operations in extreme environments Capable of switching power loads between 3 and 100 watts Not ESD sensitive Designed for high power relays or proximity sensors

Electrical Specifications


Power		Watts - maximum	100
Voltage	Switching	VDC - maximum	120
	Breakdown	VDC - minimum	150
Current	Switching	Amp - maximum	3
	Carry	Amp - maximum	3.6
Resistance	Initial Contact Resistance	Ohm - maximum	0.50
	Insulation Resistance	Ohm - minimum	1 E10
Capacitance	Contact	pF - typical	1.6
Temperature	Operating	°C	-40 to +125
	Storage	°C	-40 to +200

Magnetic Specifications

Pull - In Range		Ampere Turns	60-100
Test Coil		NARM RS-421-A	Coil IV

Physical/Operational Specifications

Capsule Volume	Excluding Leads	CC - nominal	0.74
Contact Material			Tungsten Bar and Plate
Operate Time	Including Bounce	mSeconds - maximum	4.00
Release Time	Including Bounce	mSeconds - maximum	3.90

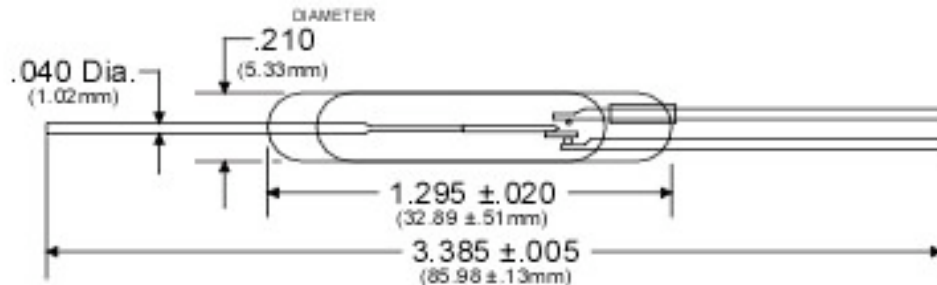

- Notes:
- Specifications are not constant across entire magnetic range.
 - Customer must exercise care in handling, mounting, lead forming, and cutting to prevent damage to glass capsule and/or switch sensitivity.
 - For information or custom configurations about performance, mounting options or packaging, contact our Sales department.
 - Information contained hereon is for informational purposes only and should not be deemed as accurate for a specific application. Consult factory for specific application information and/or latest revision.